



Lightweight Aluminium Antenna Mast / Tower

Bushcomm offers a range of ruggedized lightweight towers to position your antenna for optimal radio performance. This range includes various elevations, mounting options & stainless steel or polyester guy ropes. Available in 6, 10 and 12 metre heights. Bent outrigger, Straight stub or Combination top sections available


Bushcomm towers are all aluminium construction for strength and light weight. The Towers are air transportable, yet capable of withstanding significant winds. Maximum shipping length is only 2100mm packed.

A single tower is designed to support multiwire (BBA series) or single wire (SWC series) antennas in the inverted "V" configuration. This minimises the physical footprint and enhances NVIS and medium distance performance.

Alternatively, two towers can be erected to support a wire antenna in a horizontal configuration to improve longer distance propagation characteristics.


Choose from our ground mount or roof mount models available in elevations of 6m, 10m or 12m. All Variants can be optioned with rugged 3.2mm G304 stainless steel wire. Semi permanent quick deployment polyester rope guyed models are also available.

Generally only two people are required to erect the ground mount masts. The 12m tower includes a falling derrick to assist in erection.

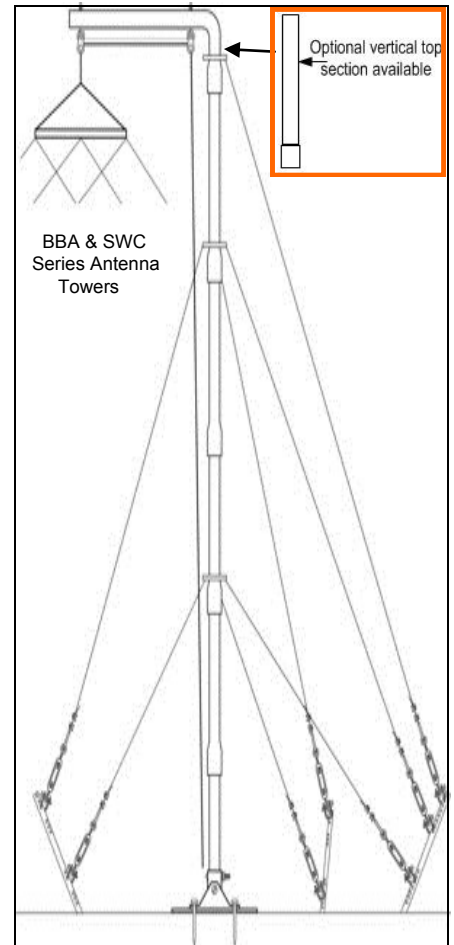


SPECIFICATION		10M Roof Version. #TOW1 - Roof Mount with steel guy wires.
MECHANICAL		
Material	★	5 sections of 50mm x 2m tubular aluminium mast
	★	Bent outrigger, Straight stub or Combination top sections available
	★	3.2mm G304 Stainless steel guy wires with insulators
	★	Heavy duty roof cleats and roof plate. Ridge version plate available
Height		10m
Shipping Weight		19.3kg

SPECIFICATION		10M Ground Version. #TOW2 - Ground Mount with Polyester guy cords.
MECHANICAL		
Material	★	5 sections of 50mm x 2m round tubular aluminium mast
	★	Bent outrigger, Straight stub or Combination top sections available
	★	6mm UV resistant polyester guy cords with tensioners
	★	Heavy duty swivel plate and guy stakes supplied.
Height		10m
Shipping Weight		27 kg

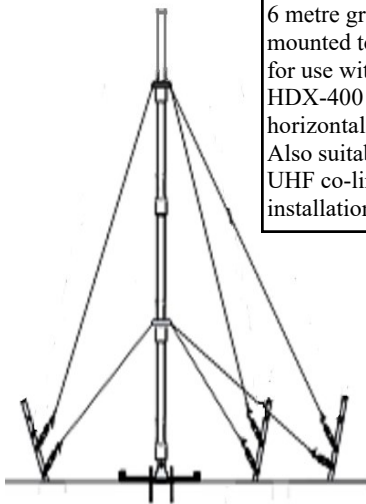

BU01319
6 metre ground or rooftop mounted tower designed for use with Bushcomm HDX-400 / Horizon 6.7 horizontal dipoles. Also suitable for VHF / UHF co-linear antenna installations

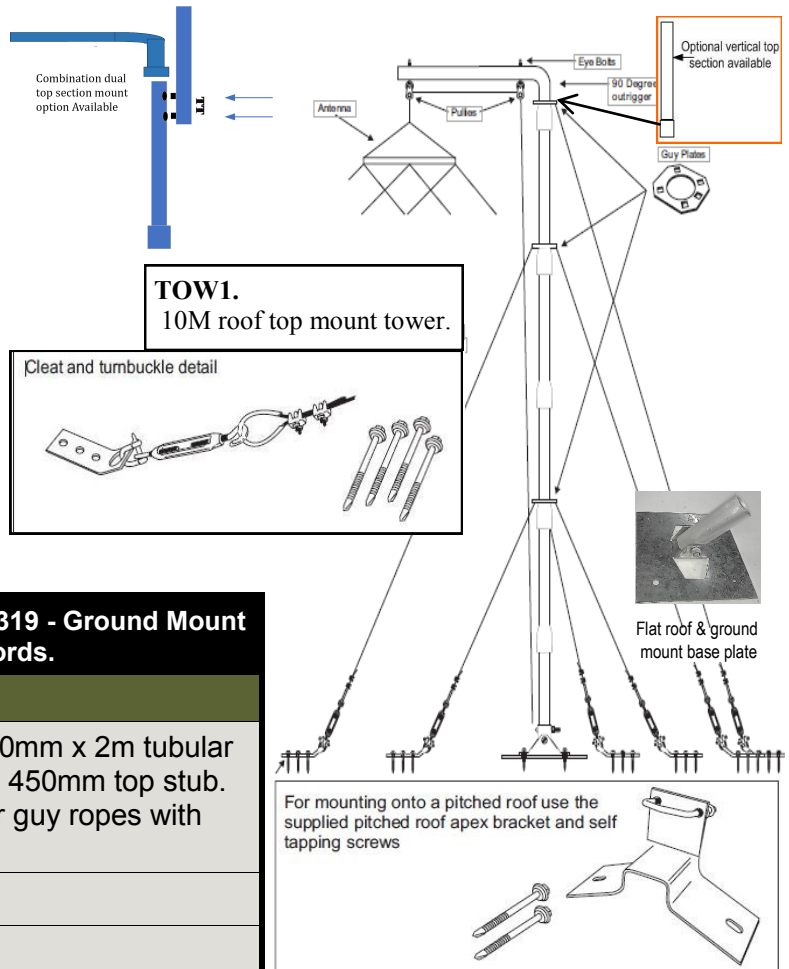

SPECIFICATION **6M Version. #BU01319 - Ground Mount with Polyester guy cords.**

MECHANICAL	
Material	<ul style="list-style-type: none"> ★ 3 sections of 50mm x 2m tubular aluminium and 450mm top stub. ★ 6mm Polyester guy ropes with tensioners
Height	6.45m
Shipping Weight	24.2kg

SPECIFICATION **10M Version. #TOW3 - Ground Mount with steel guy wires.**

MECHANICAL	
Material	<ul style="list-style-type: none"> ★ 5 sections of 50mm x 2m round tubular aluminium mast ★ Bent outrigger, Straight stub or Combination top sections available ★ 3.2mm G304 Stainless steel guy wires with insulators ★ Heavy duty swivel plate and guy stakes supplied.
Height	10m
Shipping Weight	28.3kg

SPECIFICATION **12M Heavy Duty. #TOW4 - Ground Mount with steel guy wires.**

MECHANICAL	
Material	<ul style="list-style-type: none"> ★ 6 sections x 2m tubular aluminium mast - H/Duty 4mm wall thickness ★ Bent top outrigger section ★ 3.2mm G304 Stainless steel guy wires with insulators Heavy duty swivel plate and guy rope stakes supplied.
Height	12m
Shipping Weight	38kg